

# XPS00000100D – SFP+ to XENPAK Converter

## 10G-BaseX / Data Transparent / EEPROM Not Transparent

For your product safety, please read the following information carefully before any manipulation of the transceiver:



**ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



**LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

### 1. Overview

XPS00000100D is a high performance SFP+ to XENPAK converter allowing SFP+ transceivers to be used in XENPAK-based host platforms. The data channels are totally transparent. The SFP+ to XENPAK converter has an internal EEPROM that can be read by the host platform. Once the XENPAK converter has been programmed for a specific platform, it will be possible to plug any type of generic SFP+ transceiver. The SFP+ Digital Diagnostics Monitoring information is read by the XENPAK converter and is subsequently made accessible to the host platform.

This transceiver module is compliant with the Small Form-factor Pluggable (XENPAK) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics commercial agents for compatibility with different equipment platforms.

### 2. Features

- XENPAK Multi-Source Agreement 3.0 compliant
- Hot pluggable
- 4x3.125Gbps XAU1 Electrical Interface
- MSA SFP+ input cage inside the converter
- Operating temperature range 0°C to 70°C
- Low power dissipation (< 2W)
- Digital diagnostics monitoring (DDM) Implemented
- EEPROM access, management and control via MDIO 2-wire interface according to XENPAK MSA 3.0
- Fully transparent Data Channels
- Accepts all Skylane Optics SFP+ Transceivers

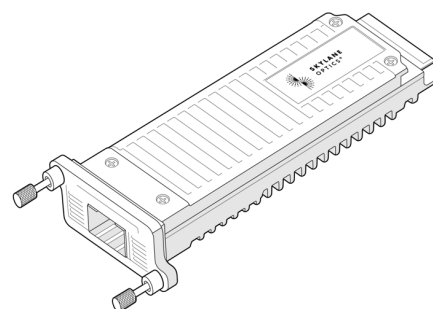


Figure 1. SFP+ to XENPAK Converter (non-binding illustration)

### 3. Applications

- 10GBASE-ZR
- 10GBASE-ER
- 10GBASE-LR
- 10GBASE-SR

## 4. Technical Parameters

4.1. Recommended Operating Conditions					
Parameter	Min	Typ	Max	Unit	Notes
Operating Temperature	0		70	°C	
Relative Humidity	5		95	%	Non condensing

## 5. Transceiver Electrical Pad Layout

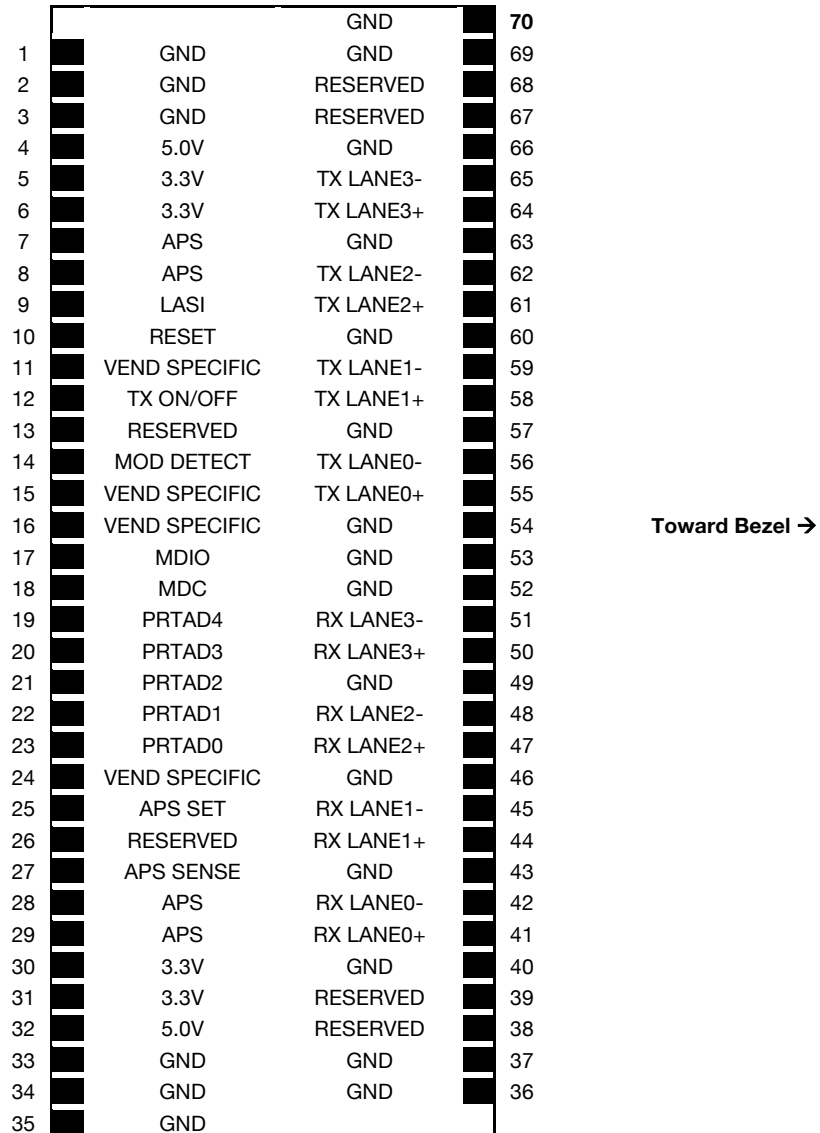


Figure 2. Transceiver Electrical Pad Layout

## 6. Pin Functions Definitions

Pin Number	Name	Function	Pin Number	Name	Function
1	GND	Ground	36	GND	Ground
2	GND	Ground	37	GND	Ground
3	GND	Ground	38	RESERVED	Not Used
4	RESERVED	Not Used	39	RESERVED	Not Used
5	3.3V	Power Supply	40	GND	Ground
6	3.3V	Power Supply	41	RX LANE0+	Module XAUI Output Lane 0+
7	APS	Adaptive Power Supply	42	RX LANE0-	Module XAUI Output Lane 0-
8	APS	Adaptive Power Supply	43	GND	Ground
9	LASI	Link Alarm Status Interrupt (10-22k pull up on host)	44	RX LANE1+	Module XAUI Output Lane 1+
10	RESET	TX OFF when MDIO RESET	45	RX LANE1-	Module XAUI Output Lane 1-
11	VEND SPECIFIC	Not Used	46	GND	Ground
12	TX ON/OFF	Transmitter ON/OFF	47	RX LANE2+	Module XAUI Output Lane 2+
13	RESERVED	Not Used	48	RX LANE2-	Module XAUI Output Lane 2-
14	MOD DETECT	Pull low inside module through 1k	49	GND	Ground
15	VEND SPECIFIC	Not Used	50	RX LANE3+	Module XAUI Output Lane 3+
16	VEND SPECIFIC	Not Used	51	RX LANE3-	Module XAUI Output Lane 3-
17	MDIO	Management Data I/O	52	GND	Ground
18	MDC	Management Data Clock	53	GND	Ground
19	PRTAD4	Port Address Bit 4 (Low=0)	54	GND	Ground
20	PRTAD3	Port Address Bit 3 (Low=0)	55	TX LANE0+	Module XAUI Input Lane 0+
21	PRTAD2	Port Address Bit 2 (Low=0)	56	TX LANE0-	Module XAUI Input Lane 0-
22	PRTAD1	Port Address Bit 1 (Low=0)	57	GND	Ground
23	PRTAD0	Port Address Bit 0 (Low=0)	58	TX LANE1+	Module XAUI Input Lane 1+
24	VEND SPECIFIC	Not Used	59	TX LANE1-	Module XAUI Input Lane 1-
25	APS SET	Feedback output for APS	60	GND	Ground
26	RESERVED	Reserved for Avalanche Photodiode use.	61	TX LANE2+	Module XAUI Input Lane 2+
27	APS SENSE	APS Sense Connection	62	TX LANE2-	Module XAUI Input Lane 2-
28	APS	Adaptive Power Supply	63	GND	Ground
29	APS	Adaptive Power Supply	64	TX LANE3+	Module XAUI Input Lane 3+
30	3.3V	Power Supply	65	TX LANE3-	Module XAUI Input Lane 3-
31	3.3V	Power Supply	66	GND	Ground
32	RESERVED	Not Used	67	RESERVED	Not Used
33	GND	Ground	68	RESERVED	Not Used
34	GND	Ground	69	GND	Ground
35	GND	Ground	70	GND	Ground

## 7. EEPROM

### XENPAK Register Set Overview

0x8000	NVR Control/Status	(2055 Bytes)	0x9000	LASI Control & Status	0xA000	Digital Optical Monitoring Functions	(256 Bytes)	0xB000	LSS Registers – Optional	(128 Bytes)
0x8001	Vendor Specific		0xA0FF		Digital Optical Monitoring Functions		0xB07F	Reserved	(1920 Bytes)	
0x8006	Non-Volatile Registers		0x9005	Extended Vendor Specific Reserved	0xA100	Digital Optical Monitoring Control and Status	(7 Bytes)	0xB07F F	10 GFC Registers – Optional	(16 Bytes)
0x8007			0x9006		0xA106	Reserved	(3833 Bytes)	0xB800		
0x8106	Extended Vendor Specific		0x9006	0xA107	Reserved			0xB80F	Reserved	(2032 Bytes)
0x8107	Reserved	0x9FFF	0xAFFF			0xB810				
0x8806						0xBFFF				
0x8807										
0x8FFF										

## 8. Ordering Information

Part Number	Description
XPS00000100D	SFP+ to XENPAK converter, protocols: 10x Gigabit Ethernet, 0°C to 70°C

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:  
[support@skylaneoptics.com](mailto:support@skylaneoptics.com)

Beyond Quality

Reliable Alliance

Performing Smartly