

# Q2C31010500F – QSFP28 Dual Fibre / PAM4

1310nm\* / 10km / 50GBASE-LR

\*1311nm CWDM

For your product safety, please read the following information carefully before any manipulation of the transceiver:



**ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



**LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

## 1. Overview

Q2C31010500F is a high performance QSFP28 transceiver module for 50 Gigabit Ethernet data links over a single mode fibre pair. The maximum reach is 10km. An internal DSP-based gearbox converts the 2 electrical input channels (each 25Gbps NRZ) into one 25GBd PAM4 signal. The transmitter is a CWDM laser generating the optical 25GBd output signal.

The receiver is a PIN Photodiode which detects the 25GBd PAM4 optical input signal. This 25GBd data stream is converted into two 25Gbps electrical output signals by the DSP.

This transceiver module is compliant with the QSFP28 Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics® commercial agents for compatibility with different equipment platforms.

## 2. Features

- QSFP28 Multi-Source Agreement compliant
- Hot pluggable QSFP28 footprint
- Supports 53.125Gbps Data Rate
- 2x 26.5625Gbps Serial Electrical Interface (50GAUI-2)
- Single LC Optical Interface
- CWDM Transmitter
- PIN Receiver
- Built-in DSP / dual CDR
- Up to 10km Point-to-Point Transmission on Single Mode Fibre
- Operating temperature range 0°C to 70°C
- Power Dissipation < 3.5W
- Single +3.3V Power Supply

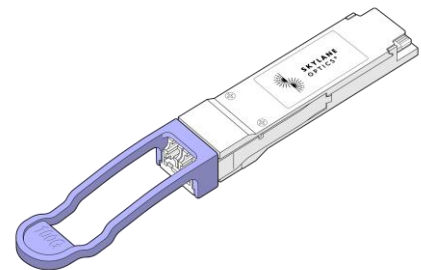


Figure 1. QSFP28 Single Fibre (non-binding illustration)

## 3. Applications

- 50GBASE-LR

## 4. Optical Interface

P/N	Wavelength	Protocol	Optical Output Power <sup>1</sup> [dBm]	Receiver Sensitivity <sup>2</sup> (OMA) [dBm]	Optical Receiver Overload <sup>3</sup> [dBm]	Link Length <sup>1,4</sup> [km]
Q2C31010500F	1311nm ITU CWDM	50GBASE-LR	-4.5 to 4.2	≤ -6.6	4.2	≤ 10

1. EOL over operating temperature range

2. 26.5625GBd, BER≤2.4×10<sup>-4</sup>, PRBS31Q, pre-FEC

3. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers before ensuring that proper optical attenuation is used

4. Cabled optical fibre as per IEEE 802.3cd-2018

## 5. Technical Parameters

### 5.1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	
Relative Humidity			85	%	Non-Condensing
Power Supply Voltage	3.135	3.3	3.465	V	
Power Supply Current			1	A	
Power Dissipation			3.5	W	

### 5.2. Transmitter Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Signalling Rate		26.5625		GBd	
Aggregated Data Rate		53.125		Gbps	5
Average Output Power	-4.5		4.2	dBm	6, 7
Launched Outer OMA ( $OMA_{outer}$ )	-1.5		4	dBm	6, 8
Launched Outer OMA minus TDECQ	-2.9			dBm	6
Centre Wavelength	1304.5		1317.5	nm	
Transmitter and Dispersion Eye Closure (TDECQ)			3.2	dB	
Extinction Ratio	3.5			dB	

5. IEEE 802.3cd-2018

6. Output power coupled into a 9/125  $\mu$ m single mode fibre

7. Average launch power (min) is informative and not the principal indicator of signal strength. A transmitter with launch power below this value cannot be compliant; however, a value above this does not ensure compliance

8. Even if the TDECQ < 1.4 dB, the  $OMA_{outer}$  (min) must exceed this value

### 5.3. Receiver Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Signalling Rate		26.5625		GBd	
Operating Wavelength	1304.5		1317.5	nm	
Average Receive Power	-10.8		4.2	dBm	9
Receive Power ( $OMA_{outer}$ )			4		
Receiver Sensitivity ( $OMA_{outer}$ )			-6.6	dBm	10

9. Average receive power (min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant; however, a value above this does not ensure compliance

10. 26.5625GBd, BER  $\leq 2.4 \times 10^{-4}$ , PRBS31Q, pre-FEC

6. Transceiver Electrical Pad Layout

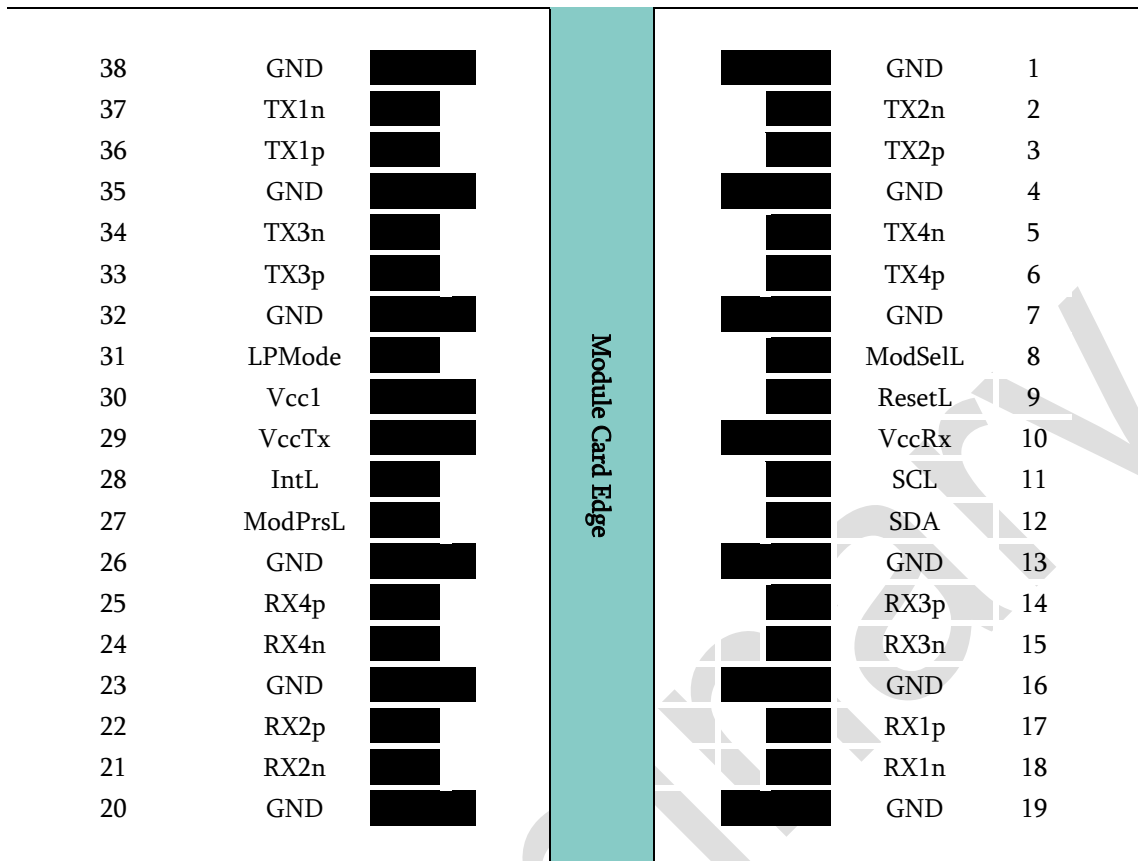


Figure 2. QSF28 Electrical Pad Layout



## 7. Module Electrical Pin Definition

Pin	Symbol	Description	Pin	Symbol	Description
1	GND	Ground	20	GND	Ground
2	TX2n	Transmitter Inverted Data Input	21	RX2n	Receiver Inverted Data Output
3	TX2p	Transmitter Non-Inverted Data Input	22	RX2p	Receiver Non-Inverted Data Output
4	GND	Ground	23	GND	Ground
5	TX4n	Not Used	24	RX4n	Not Used
6	TX4p	Not Used	25	RX4p	Not Used
7	GND	Ground	26	GND	Ground
8	ModSelL	Module Select	27	ModPrsL	Module Present
9	ResetL	Module Reset	28	IntL	Interrupt
10	VccRx	+3.3V Power Supply Receiver	29	VccTx	+3.3V Power supply transmitter
11	SCL	2-wire serial interface clock	30	Vcc1	+3.3V Power supply
12	SDA	2-wire serial interface data	31	LPMode	Low Power Mode
13	GND	Ground	32	GND	Ground
14	RX3p	Not Used	33	TX3p	Not Used
15	RX3n	Not Used	34	TX3n	Not Used
16	GND	Ground	35	GND	Ground
17	RX1p	Receiver Non-Inverted Data Output	36	TX1p	Transmitter Non-Inverted Data Input
18	RX1n	Receiver Inverted Data Output	37	TX1n	Transmitter Inverted Data Input
19	GND	Ground	38	GND	Ground

8. EEPROM

Memory map as per SFF-8436

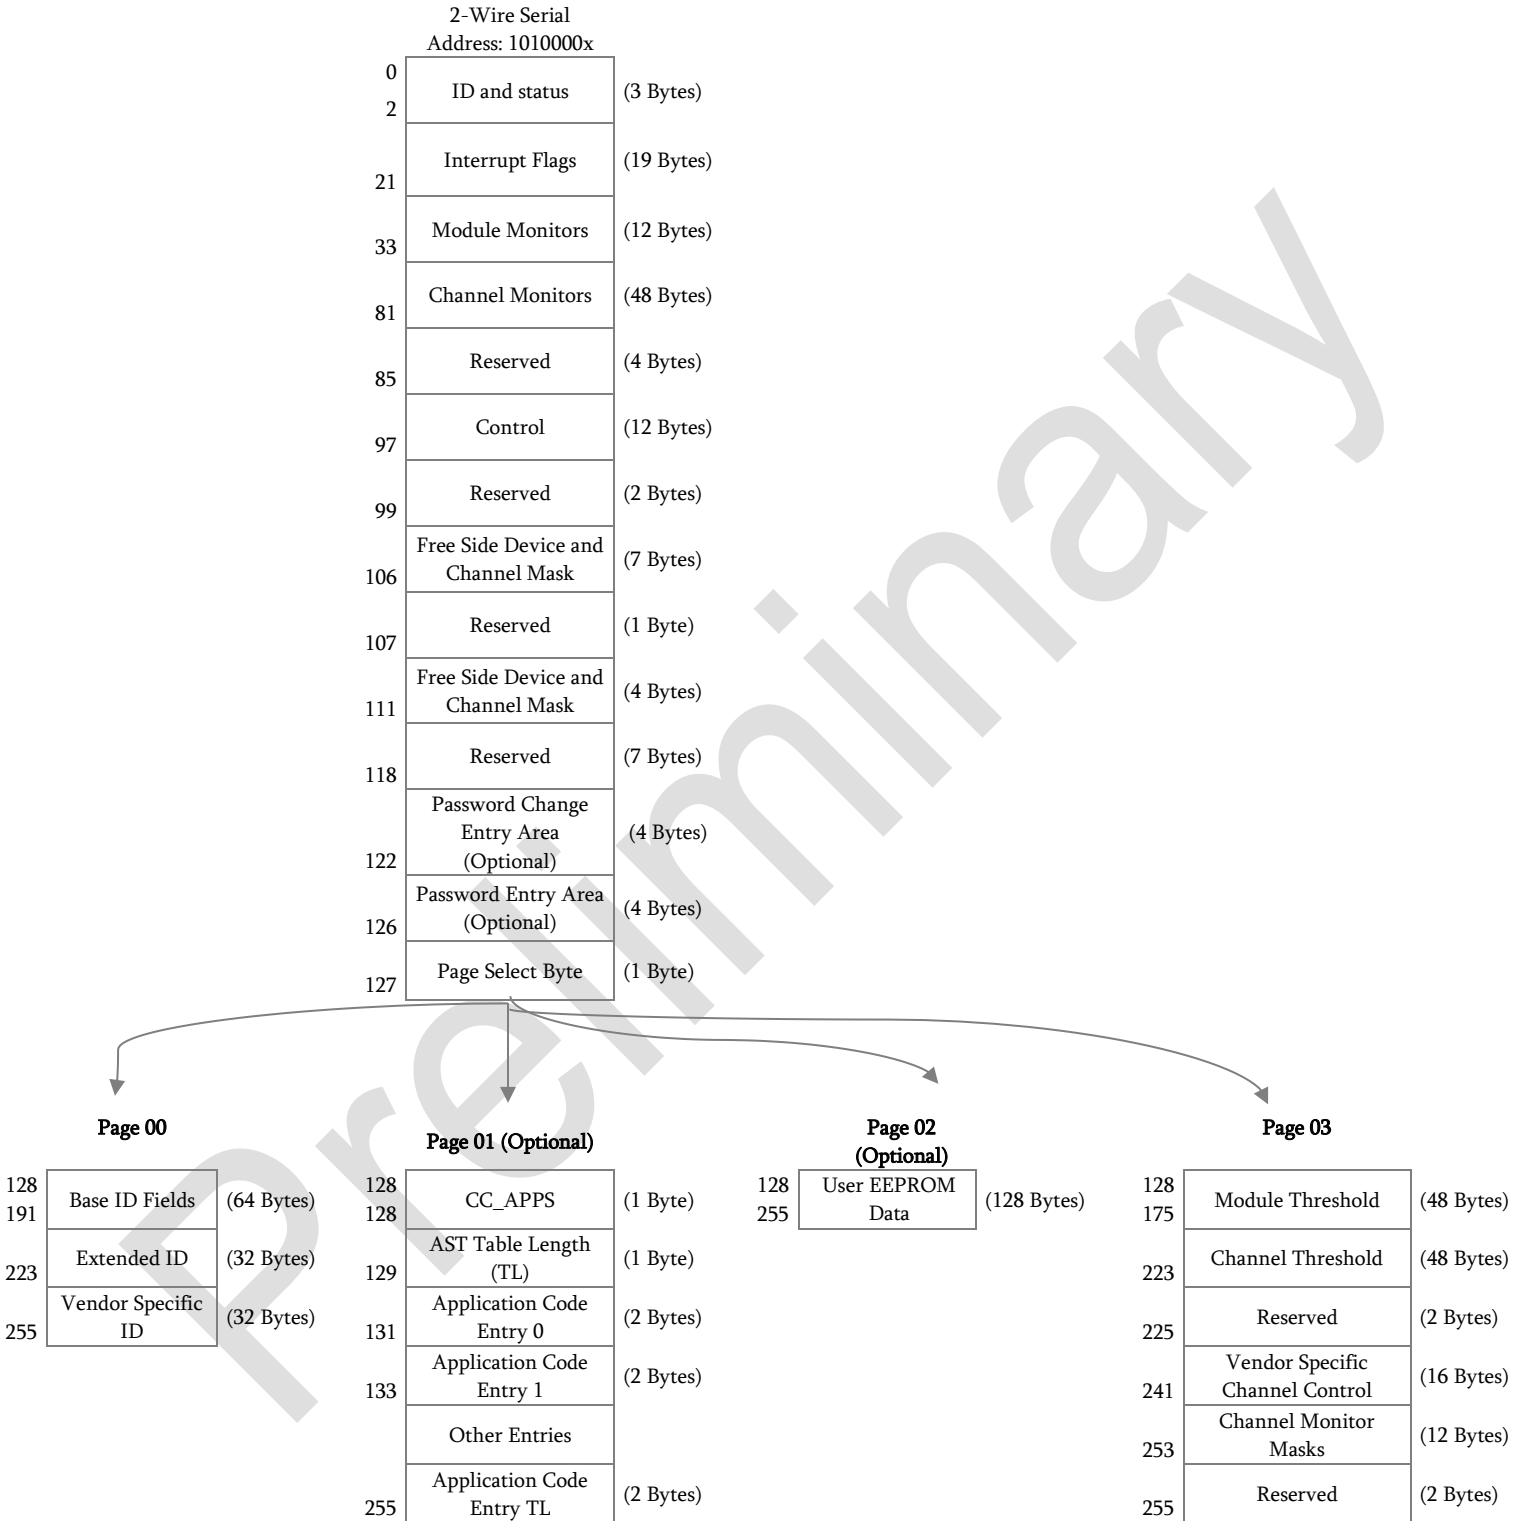


Figure 3. QSF28 Memory Map

## 9. Ordering Information

Part Number	Description
Q2C31010500F	QSFP28 Dual Fibre, PAM4, 1310nm, Tx (CWDM), Rx (PIN), maximum distance 10km on SMF, 50 Gigabit Ethernet, LC connector, Pull-Tab, 0°C to 70°C, DDM

## 10. Document Revision Information

Revision	Description
A	Initial release

Skylane Optics® supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:  
[support@skylaneoptics.com](mailto:support@skylaneoptics.com)

**Beyond  
Quality**

**Reliable  
Alliance**

**Performing  
Smartly**