

# SBD43003DRxx – SFP Single Fibre Transceiver

## Tx 1490nm Rx 1310nm / 3km / Dual Rate

For your product safety, please read the following information carefully before any manipulation of the transceiver:



### ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



### LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

## 1. Overview

SBD43003DRxx is a high performance transceiver module for Fast Ethernet and Gigabit Ethernet data links over one single mode fibre. The maximum reach is 3km, with 8dB end of life (EOL) power budget. The transmitter is a 1490nm Fabry-Pérot (FP) laser, the receiver is a PIN photodiode. Consequently, a module with a 1310nm transmitter and a 1490nm receiver is required at the opposite side of the link. The recommended counterpart is SBU34003DRxx.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics commercial agents for compatibility with different equipment platforms.

## 2. Features

- SFP Multi-Source Agreement compliant (SFF-8074)
- Hot-Pluggable SFP footprint
- Serial ID functionality supported according to SFF-8472
- Class 1 FDA and IEC60825-1 Laser Safety Compliant
- Single LC or SC connector
- 1490nm FP transmitter, 1310nm PIN receiver
- Up to 3km on 9/125µm single mode fibre
- Operating Case Temperature : 0°C to 70°C or -40°C to 85°C
- Low power dissipation (<1W)
- Digital Diagnostic Monitoring

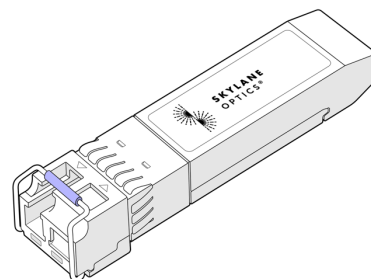


Figure 1. SFP Single Fibre (non-binding illustration)

## 3. Applications

- Gigabit Ethernet
- Fast Ethernet
- 1x Fiber Channel

## 4. Optical Interface

P/N	Wavelength [nm]	Output Optical Power <sup>2</sup> [dBm]	Optical Receiver Sensitivity <sup>3</sup> [dBm]	Optical Receiver Overload <sup>4</sup> [dBm]	Power Budget <sup>2</sup> [dB]
SBD43003DRxx	Tx1490nm Rx1310nm	-14 to -8	≤ -22	-3	≥ 8

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured with 1.25Gbps PRBS 27-1, ER=9dB, BER≤10-12

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.

## 5. Technical Parameters

### 5.1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SBD43003DR0x, SBD43003DR3x
	-40		85	°C	SBD43003DR2x, SBD43003DR5x
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

### 5.2. Transmitter Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	-14		-8	dBm	5
Centre Wavelength	1450	1490	1530	nm	
Optical Extinction Ratio ER	6			dB	
Spectral Width			4	nm	

5. Output power coupled into a 50/125 µm multi-mode fibre

### 5.3. Receiver Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Sensitivity			-22	dBm	6
Receiver Overload	-3			dBm	6
Wavelength of Operation	1260		1360	nm	

6. Measured with 1.25Gbps PRBS 2<sup>7</sup>-1, ER=9dB, BER≤10<sup>-12</sup>

## 6. Transceiver Electrical Pad Layout

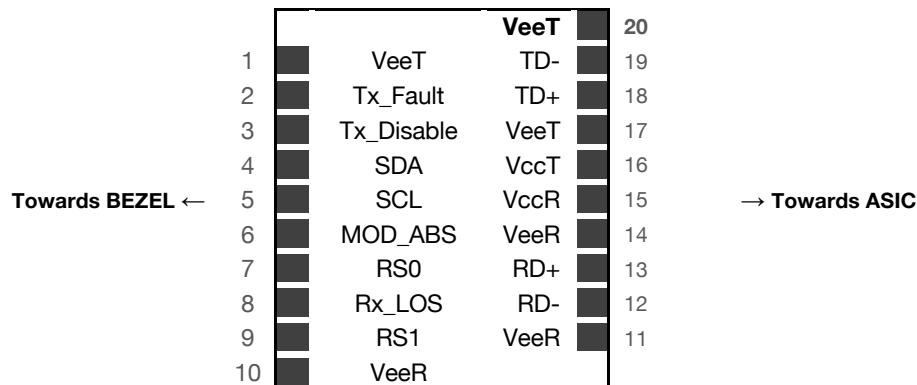


Figure 2. Transceiver Electrical Pad Layout



7. Module Electrical Pin Definition

Pin Number	Name	Function
1	VeeT	Transmitter Ground
2	TX_Fault	Transmitter Fault Indication
3	TX_Disable	Transmitter Disable
4	SDA	2-Wire Serial Interface Data (SDA)
5	SCL	2-Wire Serial Interface Clock (SCL)
6	MOD_ABS	Grounded within the module
7	RS0	Not Connected
8	Rx_LOS	Loss of signal
9	RS1	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverted received data output
13	RD+	Received data output
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmit data input
19	TD-	Inverted transmit data input
20	VeeT	Transmitter Ground

8. EEPROM

SFP MSA (SFF-8074 & SFF-8472)

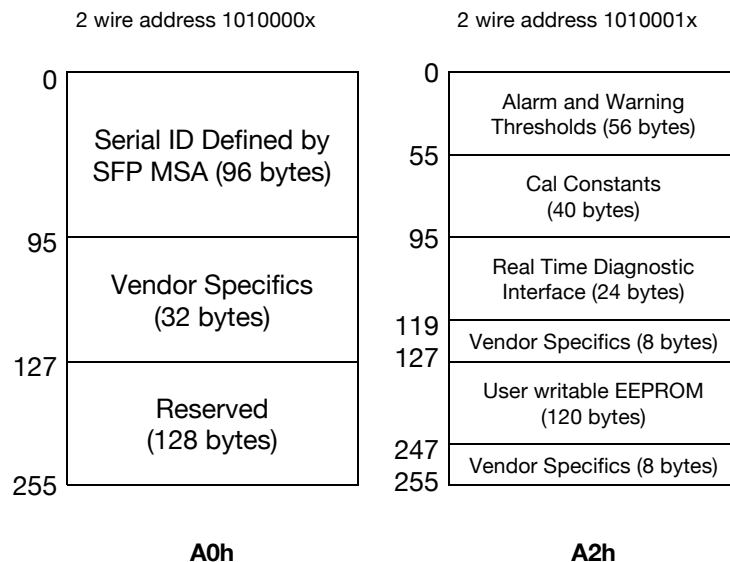


Figure 3. EEPROM of a SFP



## 9. Ordering Information

Part Number	Description
<b>SBD43003DR00</b>	SFP single fibre, nominal reach 3km, Tx: 1490nm FP, Rx: 1310nm PIN, nominal power budget 8dB, Dual Rate, <b>LC connector, 0°C to 70°C</b>
<b>SBD43003DR0D</b>	SFP single fibre, nominal reach 3km, Tx: 1490nm FP, Rx: 1310nm PIN, nominal power budget 8dB, Dual Rate, <b>LC connector, 0°C to 70°C, DDM</b>
<b>SBD43003DR20</b>	SFP single fibre, nominal reach 3km, Tx: 1490nm FP, Rx: 1310nm PIN, nominal power budget 8dB, Dual Rate, <b>LC connector, -40°C to 85°C</b>
<b>SBD43003DR2D</b>	SFP single fibre, nominal reach 3km, Tx: 1490nm FP, Rx: 1310nm PIN, nominal power budget 8dB, Dual Rate, <b>LC connector, -40°C to 85°C, DDM</b>
<b>SBD43003DR30</b>	SFP single fibre, nominal reach 3km, Tx: 1490nm FP, Rx: 1310nm PIN, nominal power budget 8dB, Dual Rate, <b>SC connector, 0°C to 70°C</b>
<b>SBD43003DR3D</b>	SFP single fibre, nominal reach 3km, Tx: 1490nm FP, Rx: 1310nm PIN, nominal power budget 8dB, Dual Rate, <b>SC connector, 0°C to 70°C, DDM</b>
<b>SBD43003DR50</b>	SFP single fibre, nominal reach 3km, Tx: 1490nm FP, Rx: 1310nm PIN, nominal power budget 8dB, Dual Rate, <b>SC connector, -40°C to 85°C</b>
<b>SBD43003DR5D</b>	SFP single fibre, nominal reach 3km, Tx: 1490nm FP, Rx: 1310nm PIN, nominal power budget 8dB, Dual Rate, <b>SC connector, -40°C to 85°C, DDM</b>

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:  
**support@skylaneoptics.com**

**Beyond  
Quality**

**Reliable  
Alliance**

**Performing  
Smartly**