

SBD43060DRxx – SFP Single Fibre

Tx 1490nm & Rx 1310nm / 60km / Dual Rate

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SBD43060DRxx is a high performance SFP transceiver module for up to 1.25Gbps data links over one single mode fibre. The maximum reach¹ is 60km, with 27dB end of life (EOL) power budget. The transmitter is a 1490nm Distributed Feedback (DFB) laser, the receiver is a 1310nm PIN photodiode. Consequently, a module with a 1310nm transmitter and a 1490nm receiver is required at the opposite side of the link. The recommended counterpart is SBU34060DRxx.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics® commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant [INF-8074]
- Hot pluggable SFP footprint
- Serial ID functionality supported according to [SFF-8472]
- Class 1 laser safety standard IEC 60825 compliant
- Single LC or SC connector
- 1490nm DFB transmitter, 1310nm PIN receiver
- 60km point-to-point transmission on single mode fibre
- Operating temperature range 0°C to 70°C or -40°C to 85°C
- Low power dissipation (<1W)
- Digital diagnostics monitoring (DDM)

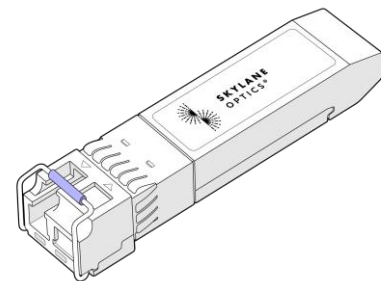


Figure 1. SFP Single Fiber (non-binding illustration)

3. Applications

- Gigabit Ethernet
- Fast Ethernet
- 1x Fiber Channel

4. Optical Interface

P/N	Wavelength [nm]	Optical Output Power ² [dBm]	Optical Receiver Sensitivity ³ [dBm]	Optical Receiver Overload ⁴ [dBm]	Power Budget ² [dB]
SBD43060DRxx	Tx 1490 nm Rx 1310 nm	0 to 5	≤ -27	-3	≥ 27

1. Distance is estimated assuming typical optical losses after decent quality fiber deployment; Only optical budget value is guaranteed

2. EOL, over operating temperature range

3. Measured with 1.25Gbps PRBS 2⁷-1, ER=9dB, BER≤10⁻¹²

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers before ensuring that proper optical attenuation is used.

5. Technical Parameters

5.1. Recommended Operating Conditions					
Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SBD43060DR0D, SBD43060DR3D, SBD43060DR0B, SBD43060DR3B
	-40		85		SBD43060DR2D, SBD43060DR5D
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

5.2. Transmitter Optical Specifications					
Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	0		5	dBm	5
Centre Wavelength	1450	1490	1530	nm	
Extinction Ratio	9			dB	
Spectral Width (-20dB)			1	nm	

5. Output power coupled into a 9/125 μm single-mode fibre

5.3. Receiver Optical Specifications					
Parameter	Min	Typ	Max	Unit	Notes
Receiver Sensitivity			-27	dBm	6
Receiver Overload	-3			dBm	
Receiver Operating Wavelength	1260		1360	nm	

6. Measured with 1.25Gbps PRBS 2⁷-1, ER=9dB, BER<10⁻¹²

6. Transceiver Electrical Pad Layout

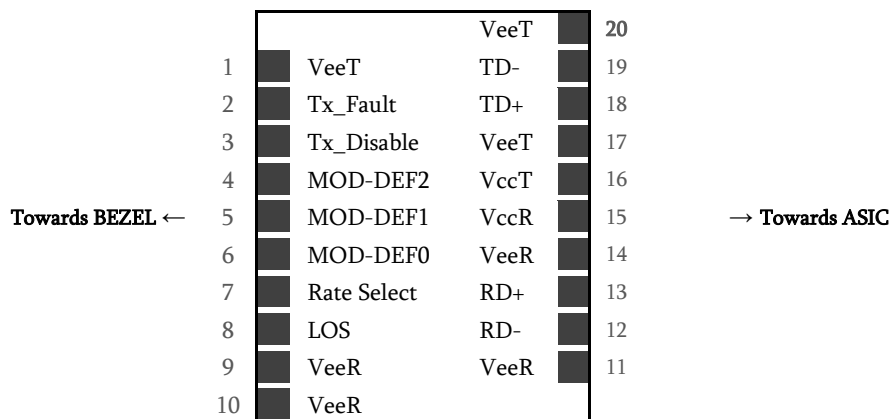


Figure 2. Transceiver Electrical Pad Layout

7. Module Electrical Pin Definition

Pin Number	Name	Function
1	VeeT	Transmitter Ground
2	TX_Fault	Transmitter Fault Indication
3	TX_Disable	Transmitter Disable
4	MOD-DEF2	2-Wire Serial Interface Data
5	MOD-DEF1	2-Wire Serial Interface Clock
6	MOD-DEF0	Grounded in Module
7	Rate Select	Not Connected
8	LOS	Loss of Signal
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverted received data output
13	RD+	Received data output
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmit data input
19	TD-	Inverted transmit data input
20	VeeT	Transmitter Ground

8. EEPROM

SFP MSA (INF-8074 & SFF-8472)

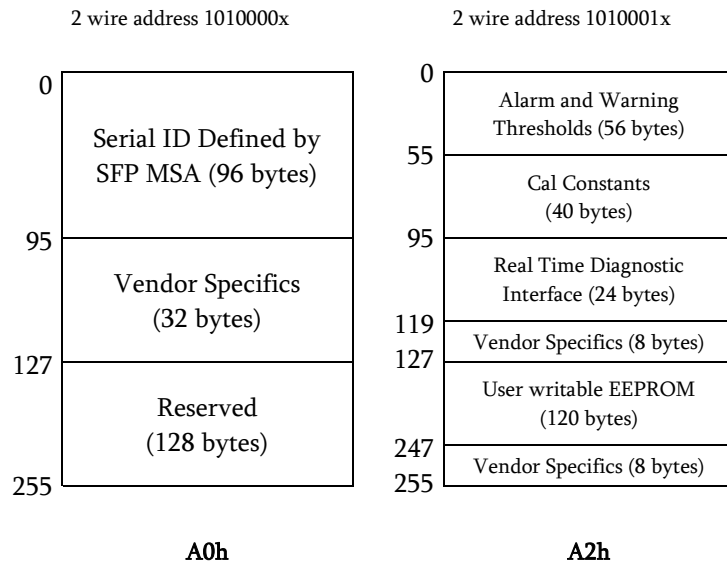


Figure 3. EEPROM of a an SFP

9. Ordering Information

Part Number	Description
SBD43060DR0D	SFP single fibre downstream, Tx 1490nm (DFB), Rx 1310nm (PIN), maximum distance 60km, power budget 27dB, Dual Rate, LC connector, 0°C to 70°C , DDM
SBD43060DR0B	SFP single fibre downstream, Tx 1490nm (DFB), Rx 1310nm (PIN), maximum distance 60km, power budget 27dB, Dual Rate, LC connector, Gen B, 0°C to 70°C , DDM
SBD43060DR2D	SFP single fibre downstream, Tx 1490nm (DFB), Rx 1310nm (PIN), maximum distance 60km, power budget 27dB, Dual Rate, LC connector, -40°C to 85°C , DDM
SBD43060DR3D	SFP single fibre downstream, Tx 1490nm (DFB), Rx 1310nm (PIN), maximum distance 60km, power budget 27dB, Dual Rate, SC connector, 0°C to 70°C , DDM
SBD43060DR3B	SFP single fibre downstream, Tx 1490nm (DFB), Rx 1310nm (PIN), maximum distance 60km, power budget 27dB, Dual Rate, SC connector, Gen B, 0°C to 70°C , DDM
SBD43060DR5D	SFP single fibre downstream, Tx 1490nm (DFB), Rx 1310nm (PIN), maximum distance 60km, power budget 27dB, Dual Rate, SC connector, -40°C to 85°C , DDM

10. Document Revision Information

Revision	Description
A	Initial release
B	Gen B variants added

Skylane Optics® supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

Beyond
Quality

Reliable
Alliance

Performing
Smartly