

SBU34020GExx – SFP Single Upstream Transceiver

Tx 1310nm & Rx 1490nm / 20km / Gigabit Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SBU34020GExx is a high-performance transceiver module for Gigabit Ethernet data links over one single mode fibre. The maximum reach¹ is 20km, with 14dB end of life (EOL) power budget. The transmitter is a 1310nm Fabry-Pérot (FP) laser, the receiver a 1490nm PIN photodiode. Consequently, a module with a 1490nm transmitter and a 1310nm receiver is required at the opposite side of the link. The recommended counterpart is SBD43020GExx.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics® commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant [INF-8074]
- Hot pluggable SFP footprint
- Serial ID functionality supported according to [SFF-8472]
- Class 1 laser safety standard IEC 60825 compliant
- Single LC or SC connector
- 1310nm FP transmitter, 1490nm PIN receiver
- 20km point-to-point transmission on single mode fibre
- Operating temperature range 0°C to 70°C or -40°C to 85°C
- Low power dissipation (<1W)
- Digital Diagnostics Monitoring (DDM)

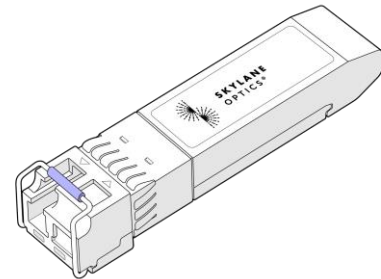


Figure 1. SFP Single Fiber (non-binding illustration)

3. Applications

- Gigabit Ethernet
- 1x Fiber Channel

4. Optical Interface

P/N	Wavelength [nm]	Optical Output Power ² [dBm]	Optical Receiver Sensitivity ³ [dBm]	Optical Receiver Overload ⁴ [dBm]	Power Budget ² [dB]
SBU34020GEx0	Tx 1310 nm Rx 1490 nm	-8 to -3	≤ -22	0	≥ 14

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; Only optical budget value is guaranteed
 2. EOL, over operating temperature range, together with SBD43020GExx
 3. Measured with 1.25Gbps PRBS 2²³-1, ER=9dB, BER<10⁻¹²
 4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used

5. Technical Parameters

5.1. Recommended Operating Conditions					
Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SBU34020GE0D, SBU34020GE0B, SBU34020GE3D, SBU34020GE3B
	-40		85		
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

5.2. Transmitter Optical Specifications					
Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	-8		-3	dBm	5
Centre Wavelength	1260	1310	1360	nm	
Optical Extinction Ratio ER	6			dB	
Spectral Width (-20dB)			3.5	nm	

5. Output power coupled into a 9/125 µm single-mode fibre

5.3. Receiver Optical Specifications					
Parameter	Min	Typ	Max	Unit	Notes
Sensitivity			-22	dBm	6
Receiver Overload	0			dBm	6
Wavelength of Operation	1450	1490	1530	nm	

6. Measured with 1.25Gbps PRBS 2²³-1, ER=9dB, BER<10⁻¹²

6. Transceiver Electrical Pad Layout

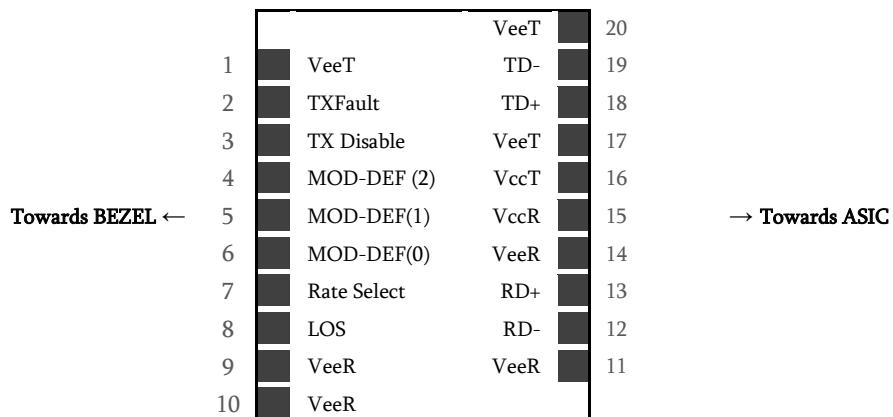


Figure 2. Transceiver Electrical Pad Layout

7. Module Electrical Pin Definition

Pin Number	Name	Function
1	VeeT	Transmitter Ground
2	TX Fault	Transmitter Fault Indication
3	TX_Disable	Transmitter Disable
4	MOD-DEF2	2-Wire Serial Interface Data
5	MOD-DEF1	2-Wire Serial Interface Clock
6	MOD-DEF0	Grounded in Module
7	Rate Select	Not Connected
8	LOS	Loss of Signal
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverted Received Data Out
13	RD+	Received Data Out
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmit Data In
19	TD-	Inverted Transmit Data In
20	VeeT	Transmitter Ground

8. EEPROM

SFP MSA (SFF-8074 & SFF-8472)

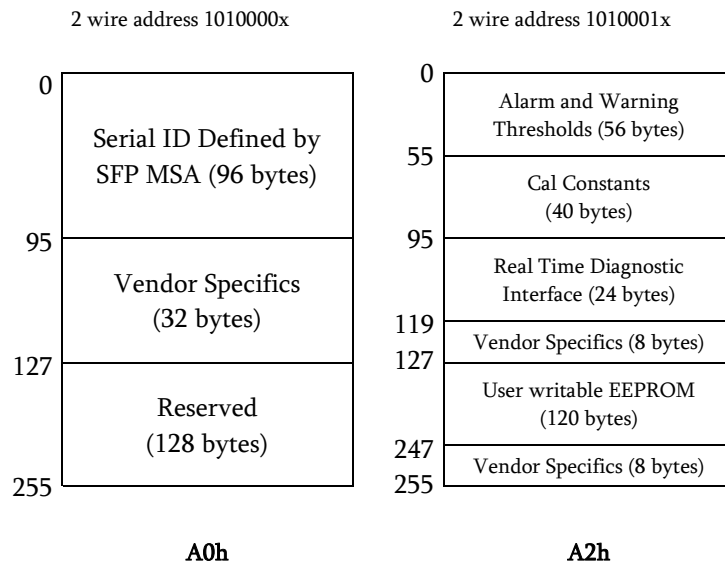


Figure 3. EEPROM of a an SFP

9. Ordering Information

Part Number	Description
SBU34020GE0D	SFP single fibre upstream, Tx 1310nm (FP), Rx 1490nm (PIN), maximum distance 20km, power budget 14dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SBU34020GE0B	SFP single fibre upstream, Tx 1310nm (FP), Rx 1490nm (PIN), maximum distance 20km, power budget 14dB, Gigabit Ethernet, LC connector, Gen B, 0°C to 70°C , DDM
SBU34020GE2D	SFP single fibre upstream, Tx 1310nm (FP), Rx 1490nm (PIN), maximum distance 20km, power budget 14dB, Gigabit Ethernet, LC connector, -40°C to 85°C , DDM
SBU34020GE2B	SFP single fibre upstream, Tx 1310nm (FP), Rx 1490nm (PIN), maximum distance 20km, power budget 14dB, Gigabit Ethernet, LC connector, Gen B, -40°C to 85°C , DDM
SBU34020GE3D	SFP single fibre upstream, Tx 1310nm (FP), Rx 1490nm (PIN), maximum distance 20km, power budget 14dB, Gigabit Ethernet, SC connector, 0°C to 70°C , DDM
SBU34020GE3B	SFP single fibre upstream, Tx 1310nm (FP), Rx 1490nm (PIN), maximum distance 20km, power budget 14dB, Gigabit Ethernet, SC connector, Gen B, 0°C to 70°C , DDM
SBU34020GE5D	SFP single fibre upstream, Tx 1310nm (FP), Rx 1490nm (PIN), maximum distance 20km, power budget 14dB, Gigabit Ethernet, SC connector, -40°C to 85°C , DDM
SBU34020GE5B	SFP single fibre upstream, Tx 1310nm (FP), Rx 1490nm (PIN), maximum distance 20km, power budget 14dB, Gigabit Ethernet, SC connector, Gen B, -40°C to 85°C , DDM

10. Document Revision Information

Revision	Description
A	Initial release
B	Gen B variants added. Non-DDM variants removed

Skylane Optics® supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

Beyond
Quality

Reliable
Alliance

Performing
Smartly