

SBU35020EGxx – SFP Single Fibre Upstream

Tx 1310nm & Rx 1550nm / 20km / FE & OC-3

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SBU35020EGxx is a high performance transceiver module for Fast Ethernet and OC-3 data links over one single mode fibre. The maximum reach is 20km, with 13dB end of life (EOL) power budget. The transmitter is a 1310nm Fabry-Pérot (FP) laser, the receiver a 1550nm PIN photodiode. Consequently, a module with a 1550nm transmitter and a 1310nm receiver is required at the opposite side of the link. The recommended counterpart is SBD53020EGxx.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics® commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant [INF-8074]
- Hot pluggable SFP footprint
- Serial ID functionality supported according to [SFF-8472]
- Class 1 laser safety standard IEC 60825 compliant
- Single LC or SC connector
- 1310nm FP transmitter, 1550nm PIN receiver
- 20km point-to-point transmission on one single mode fibre
- SONET OC-3/SDH STM-1 compatible
- Operating temperature range 0°C to 70°C or -40°C to 85°C
- Low power dissipation (<1W)
- Digital Diagnostics Monitoring (DDM)

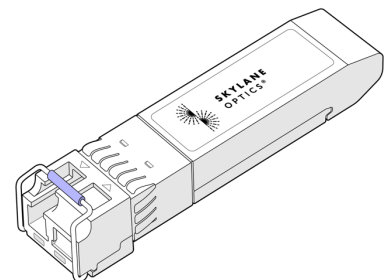


Figure 1. SFP Single Fiber (non-binding illustration)

3. Applications

- Telecom SONET/SDH
- Datacom Fast Ethernet

4. Optical Interface

P/N	Wavelength [nm]	Output Optical Power ² [dBm]	Optical Receiver Sensitivity ³ [dBm]	Optical Receiver Overload ⁴ [dBm]	Power Budget ² [dB]
SBU35020EGxx	Tx 1310 nm Rx 1550 nm	-15 to -8	≤ -28	-3	≥ 13

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range, together with SBD53020EGxx

3. Measured with 155Mbps PRBS 223-1, ER=9dB, BER≤10⁻¹⁰

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.

5. Technical Parameters

5.1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SBU35020EG0x, SBU35020EG3x
	-40		85		SBU35020EG2x, SBU35020EG5x
Relative Humidity			95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

5.2. Transmitter Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	-15		-8	dBm	5
Centre Wavelength	1260	1310	1360	nm	
Spectral Width (RMS)			4	nm	
Optical Extinction Ratio	8.2			dB	

5. Output power coupled into a 9/125 µm single-mode fiber

5.3. Receiver Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Receiver Sensitivity			-28	dBm	6
Receiver Overload	-3			dBm	6
Wavelength of Operation	1500	1550	1600	nm	

6. Measured with 155Mbps PRBS 2²³-1, ER=9dB, BER≤10⁻¹⁰

6. Transceiver Electrical Pad Layout

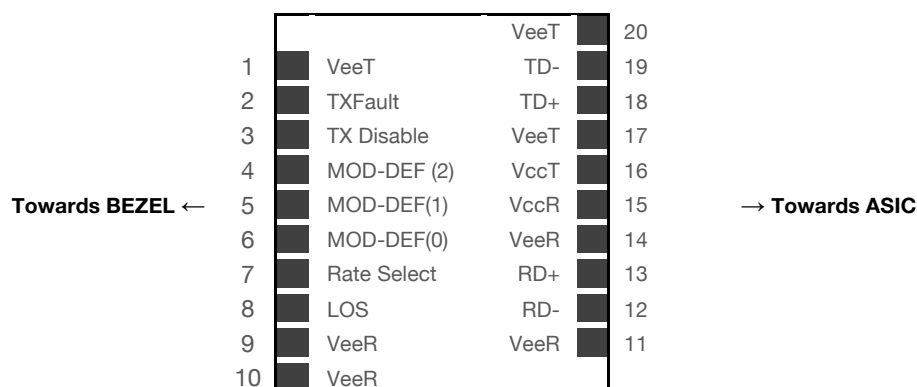


Figure 2. Transceiver Electrical Pad Layout



9. Ordering Information

Part Number	Description
SBU35020EG00	SFP single fibre downstream, Tx 1310nm (FP) , Rx 1550nm (PIN), maximum distance 20km, power budget 14dB, Fast Ethernet & OC-3, LC connector, 0°C to 70°C
SBU35020EG0D	SFP single fibre downstream, Tx 1310nm (FP) , Rx 1550nm (PIN), maximum distance 20km, power budget 14dB, Fast Ethernet & OC-3, LC connector, 0°C to 70°C, DDM
SBU35020EG20	SFP single fibre downstream, Tx 1310nm (FP) , Rx 1550nm (PIN), maximum distance 20km, power budget 14dB, Fast Ethernet & OC-3, LC connector, -40°C to 85°C
SBU35020EG2D	SFP single fibre downstream, Tx 1310nm (FP) , Rx 1550nm (PIN), maximum distance 20km, power budget 14dB, Fast Ethernet & OC-3, LC connector, -40°C to 85°C, DDM
SBU35020EG30	SFP single fibre downstream, Tx 1310nm (FP) , Rx 1550nm (PIN), maximum distance 20km, power budget 14dB, Fast Ethernet & OC-3, SC connector, 0°C to 70°C
SBU35020EG3D	SFP single fibre downstream, Tx 1310nm (FP) , Rx 1550nm (PIN), maximum distance 20km, power budget 14dB, Fast Ethernet & OC-3, SC connector, 0°C to 70°C, DDM
SBU35020EG50	SFP single fibre downstream, Tx 1310nm (FP) , Rx 1550nm (PIN), maximum distance 20km, power budget 14dB, Fast Ethernet & OC-3, SC connector, -40°C to 85°C
SBU35020EG5D	SFP single fibre downstream, Tx 1310nm (FP) , Rx 1550nm (PIN), maximum distance 20km, power budget 14dB, Fast Ethernet & OC-3, SC connector, -40°C to 85°C, DDM

10. Document Revision Information

Revision	Description
A	Initial release

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

**Beyond
Quality**

**Reliable
Alliance**

**Performing
Smartly**