

SFCxxB24GExD – SFP Dual Fibre CWDM

CWDM / 24dB / Gigabit Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SFCxxB24GExD is a high performance transceiver module for Gigabit Ethernet data links over a single mode fibre pair. The power budget is 24dB end of life (EOL). The transmitter is a CWDM DFB laser, the receiver a PIN photodiode.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant (INF-8074)
- Hot pluggable SFP footprint
- Serial ID functionality supported according to (SFF-8472)
- Dual LC connector
- CWDM DFB transmitter (channels 27 to 45)
- PIN receiver
- Power budget >24dB
- Operating temperature range 0°C to 70°C or -20°C to 85°C
- Low power dissipation (<1W)
- Digital diagnostics monitoring (DDM)




Figure 1. SFP Dual Fiber (non-binding illustration)

3. Applications

- Gigabit Ethernet
- 1x Fiber Channel

4. Optical Interface

P/N	Wavelength [nm]	Optical Output Power ² [dBm]	Optical Receiver Sensitivity ³ [dBm]	Receiver Overload ⁴ [dBm]	Power Budget ¹ [dB]
SFCxxB24GExD	ITU CWDM (27 to 45)	0 to 5	≤ -24	0	≥ 24

1. Only optical budget value is guaranteed, see section 9 for estimated transmission reach
2. EOL, over operating temperature range
3. Measured at 1.25Gbps, PRBS BER 27-1, ER=9dB, BER≤10⁻¹²
4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.

5. Technical Parameters

5.1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SFPxxB24GE0D
	-20		85	°C	SFPxxB24GE1D
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

5.2. Transmitter Optical Specifications

Parameter	Min	Typ	Max	Units	Notes
Average Output Power	0		5	dBm	5
Centre Wavelength Range	1270		1450	nm	
Wavelength	$\lambda_T - 6$	λ_T	$\lambda_T + 7.5$	nm	6
Spectral Width (-20dB)			1	nm	
Extinction Ratio	8.2			dB	

5. Output power coupled into a 9/125 μm single-mode fibre

6. ITU-T G.694.2 CWDM. For available wavelengths, see section **Erreur ! Source du renvoi introuvable.**

5.3. Receiver Optical Specifications

Parameter	Min	Typ	Max	Units	Notes
Receiver Sensitivity			-24	dBm	7
Receiver Overload	0			dBm	7
Receiver Operating Range	1260		1630	nm	

7. Measured at 1.25Gbps, PRBS BER 2^7-1 , ER=9dB, BER $\leq 10^{-12}$

6. Transceiver Electrical Pad Layout

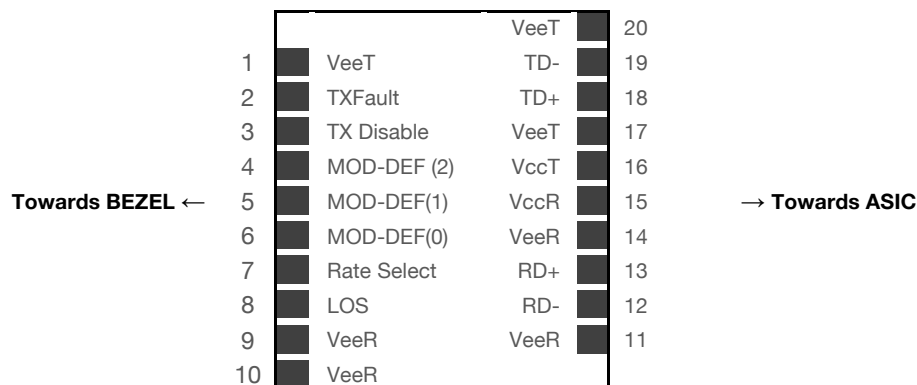


Figure 2. Transceiver Electrical Pad Layout

7. Module Electrical Pin Definition

SFP MSA [INF-8074i]

Pin Number	Name	Function
1	VeeT	Transmitter Ground
2	TX Fault	Transmitter Fault Indication
3	TX_Disable	Transmitter Disable
4	MOD-DEF2	2-Wire Serial Interface Data
5	MOD-DEF1	2-Wire Serial Interface Clock
6	MOD-DEF0	Grounded in Module
7	Rate Select	Not Used
8	LOS	Loss of Signal
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverted Received Data Out
13	RD+	Received Data Out
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmit Data In
19	TD-	Inverted Transmit Data In
20	VeeT	Transmitter Ground

8. EEPROM

SFP MSA (INF-8074i)

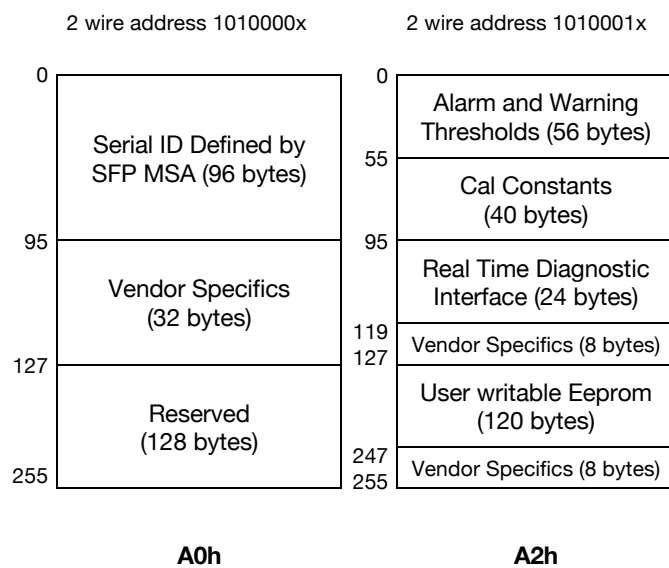


Figure 3. EEPROM of a an SFP

9. Transmission Reach

The actual transmission reach is depending on the CWDM channel used, due to the wavelength dependent attenuation in the fibre path. The table below shows the *estimated* transmission reach for CWDM channels 27 to 45.

NB: Distances are purely indicative and only valid for G.652 fibre. Only the optical power budget is guaranteed. Additional optical insertion loss from CWDM filters, splices, optical connectors etc. is not included.

CWDM Channel	Nominal Wavelength [nm]	Estimated Reach [km]
27	1270	60
29	1290	65
31	1310	65
33	1330	70
35	1350	70
37	1370	55
39	1390	45
41	1410	55
43	1430	70
45	1450	80

10. Ordering Information

Part Number	Description
SFC27B24GE0D	SFP dual fibre CWDM, Tx 1270nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC29B24GE0D	SFP dual fibre CWDM, Tx 1290nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC31B24GE0D	SFP dual fibre CWDM, Tx 1310nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC33B24GE0D	SFP dual fibre CWDM, Tx 1330nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC35B24GE0D	SFP dual fibre CWDM, Tx 1350nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC37B24GE0D	SFP dual fibre CWDM, Tx 1370nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC39B24GE0D	SFP dual fibre CWDM, Tx 1390nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC41B24GE0D	SFP dual fibre CWDM, Tx 1410nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC43B24GE0D	SFP dual fibre CWDM, Tx 1430nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC45B24GE0D	SFP dual fibre CWDM, Tx 1450nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, 0°C to 70°C , DDM
SFC27B24GE1D	SFP dual fibre CWDM, Tx 1270nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM
SFC29B24GE1D	SFP dual fibre CWDM, Tx 1290nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM
SFC31B24GE1D	SFP dual fibre CWDM, Tx 1310nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM
SFC33B24GE1D	SFP dual fibre CWDM, Tx 1330nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM
SFC35B24GE1D	SFP dual fibre CWDM, Tx 1350nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM

SFC37B24GE1D	SFP dual fibre CWDM, Tx 1370nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM
SFC39B24GE1D	SFP dual fibre CWDM, Tx 1390nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM
SFC41B24GE1D	SFP dual fibre CWDM, Tx 1410nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM
SFC43B24GE1D	SFP dual fibre CWDM, Tx 1430nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM
SFC45B24GE1D	SFP dual fibre CWDM, Tx 1450nm (CWDM DFB) , Rx (PIN), power budget 24dB, Gigabit Ethernet, LC connector, -20°C to 85°C , DDM

11. Document Revision Information

Revision	Description
A	Initial release

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

**Beyond
Quality**

**Reliable
Alliance**

**Performing
Smartly**