

SFP13001DRxD – SFP Dual Fibre

1310nm / 1km / Fast & Gigabit Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SFP13001DRxD is a high performance transceiver module for Gigabit Ethernet data links over a multimode fiber pair. The maximum reach is 1km, for a 12dB end of life (EOL) power budget. The emitter is a 1310nm Fabry-Perot (FP) laser, the receiver is a PIN photodiode.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant [INF-8074]
- Hot pluggable SFP footprint
- Serial ID functionality supported according to [SFF-8472]
- Class 1 laser safety standard IEC 60825 compliant
- Dual LC connector
- 1310nm FP transmitter
- 550m point-to-point transmission on 62.5/125µm multimode fibre
- 1km point-to-point transmission on 50/125µm multimode fibre (OM3)
- 1x Fibre Channel compliant
- Fast Ethernet & Gigabit Ethernet compliant
- Operating temperature range 0°C to 70°C or -40°C to 85°C
- Low power dissipation (<1W)
- Digital diagnostics monitoring (DDM)




Figure 1. SFP Dual Fiber 1310nm (non-binding illustration)

3. Applications

- FTTx
- Gigabit Ethernet
- Storage

4. Optical Interface

| P/N | Wavelength [nm] | Output Optical Power ² [dBm] | Optical Receiver Sensitivity ³ [dBm] | Optical Receiver Overload ⁴ [dBm] | Power Budget ² [dB] |
|--------------|-----------------|-----------------------------------------|-------------------------------------------------|----------------------------------------------|--------------------------------|
| SFP13001DRxD | 1310nm | -9 to -3 | ≤ -21 | 0 | ≥ 12 |

1. Distance is estimated assuming typical optical losses after decent quality fiber deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured at Gigabit Ethernet

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.

5. Technical Parameters

5.1. Recommended Operating Conditions

| Parameter | Min | Typ | Max | Unit | Notes |
|----------------------------|------|-----|------|------|------------------|
| Storage temperature | -40 | | 85 | °C | |
| Operating Case Temperature | -40 | | 85 | °C | For SFP13001DR2D |
| Operating Case Temperature | 0 | | 70 | °C | For SFP13001DR0D |
| Relative Humidity | 5 | | 95 | % | Non condensing |
| Power Supply Voltage | 3.15 | 3.3 | 3.45 | V | |
| Power Supply Current | | | 300 | mA | |

5.2. Transmitter Optical Specifications

| Parameter | Min | Typ | Max | Unit | Notes |
|-----------------------------|------|------|------|------|-------|
| Average Output Power | -9 | | -3 | dBm | 5 |
| Center Wavelength | 1260 | 1310 | 1360 | nm | |
| Optical Extinction Ratio ER | 9 | | | dB | |
| Spectral Width | | | 5 | nm | |

5. Output power coupled into a 9/125 μm multimode fiber

5.3. Receiver Optical Specifications

| Parameter | Min | Typ | Max | Unit | Notes |
|-------------------------|------|-----|------|------|-------|
| Sensitivity | | | -21 | dBm | 6 |
| Receiver Overload | 0 | | | dBm | |
| Wavelength of Operation | 1260 | | 1600 | nm | |

6. With BER better than or equal to 1×10^{-12} , measured in the center of the eye opening with 2^7-1 PRBS

6. Transceiver Electrical Pad Layout

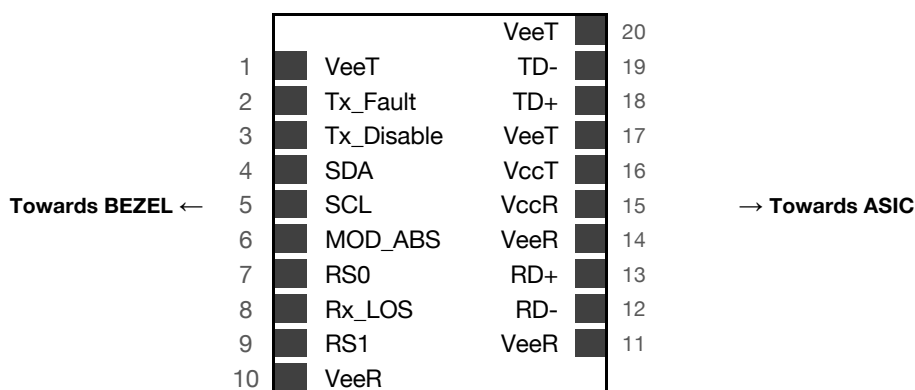


Figure 2. Transceiver Electrical Pad Layout

9. Ordering Information

| Part Number | Description |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| SFP13001DR0D | SFP dual fibre, Tx 1310nm (FP), Rx (PIN), maximum distance 1km, power budget 12dB, Gigabit Ethernet, LC connector, 0°C to 70°C, DDM |
| SFP13001DR2D | SFP dual fibre, Tx 1310nm (FP), Rx (PIN), maximum distance 1km, power budget 12dB, Gigabit Ethernet, LC connector, -40°C to 85°C, DDM |

10. Document Revision Information

| Revision | Description |
|----------|-----------------|
| A | Initial release |

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

**Beyond
Quality**

**Reliable
Alliance**

**Performing
Smartly**