

# SFP15040GExx – SFP Dual fibre

1550nm / 40km / Gigabit Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



**ESD**

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



**LASER SAFETY**

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

## 1. Overview

SFP15040GExx is a high-performance transceiver module for Gigabit Ethernet data link over a single mode fibre pair. The maximum reach<sup>1</sup> is 40km, for a 19dB end of life (EOL) power budget. The transmitter is a 1550nm DFB laser, the receiver is a PIN photodiode.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics commercial agents for compatibility with different equipment platforms.

## 2. Features

- SFP Multi-Source Agreement compliant [INF-8074]
- Hot-Pluggable SFP Footprint Duplex LC Connector Interface
- Serial ID functionality supported according to [SFF-8472]
- Class 1 laser safety standard IEC 60825 compliant
- Dual LC Connector
- 1550nm DFB Laser Transmitter
- 40km point to point transmission, on a single mode fibre
- Gigabit Ethernet
- Operating Case Temperature 0°C to +70°C or -40°C to +85°C
- Low power dissipation (<1W)
- Digital Diagnostics Monitoring (DDM)

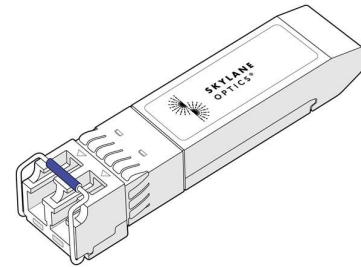


Figure 1. SFP Dual Fibre (non-binding illustration)

## 3. Applications

- Gigabit Ethernet Switches and Routers
- Fibre Channel Switch Infrastructure

## 4. Optical Interface

P/N	Wavelength [nm]	Output Optical Power <sup>2</sup> [dBm]	Optical Receiver Sensitivity <sup>3</sup> [dBm]	Optical Receiver Overload <sup>4</sup> [dBm]	Power Budget <sup>2</sup> [dB]
SFP15040GExx	1550nm	-5 to 0	≤ -24	0	≥ 19

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured with 1.25Gbps PRBS 2<sup>7</sup>-1, ER=9dB, BER<10<sup>-12</sup>

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.

## 5. Technical Parameters

5.1. Recommended Operating Conditions					
Parameter	Min	Typ	Max	Units	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SFP15040GE0D, SFP15040GE0B
	-40		85		SFP15040GE2D, SFP15040GE2B
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

5.2. Transmitter Optical Specifications					
Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	-5		0	dBm	5
Centre Wavelength	1500	1550	1600	nm	
Spectral Width (-20dB)			1	nm	
Extinction Ratio	9			dB	

5. Output power coupled into a 9/125 μm single mode fibre

5.3. Receiver Optical Specifications					
Parameter	Min	Typ	Max	Unit	Notes
Receiver Sensitivity			-24	dBm	6
Receiver Overload	0			dBm	
Operating Wavelength	1260		1600	nm	

6. Measured with 1.25Gbps PRBS 2<sup>7</sup>-1, ER=9dB, BER=10<sup>-12</sup>

## 6. Transceiver Electrical Pad Layout

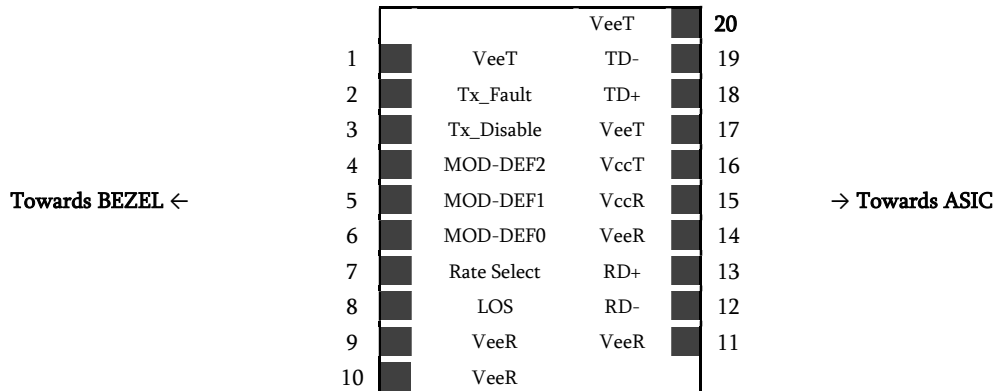


Figure 2. Transceiver Electrical Pad Layout

7. Module Electrical Pin Definition

Pin Number	Name	Function
1	VeeT	Transmitter Ground
2	TX Fault	Transmitter Fault Indication
3	TX_Disable	Transmitter Disable
4	MOD-DEF2	2-Wire Serial Interface Data
5	MOD-DEF1	2-Wire Serial Interface Clock
6	MOD-DEF0	Grounded in Module
7	Rate Select	Not Used
8	LOS	Loss of Signal
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverted Received Data Out
13	RD+	Received Data Out
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmit Data In
19	TD-	Inverted Transmit Data In
20	VeeT	Transmitter Ground

8. EEPROM

SFP MSA [INF-8074]

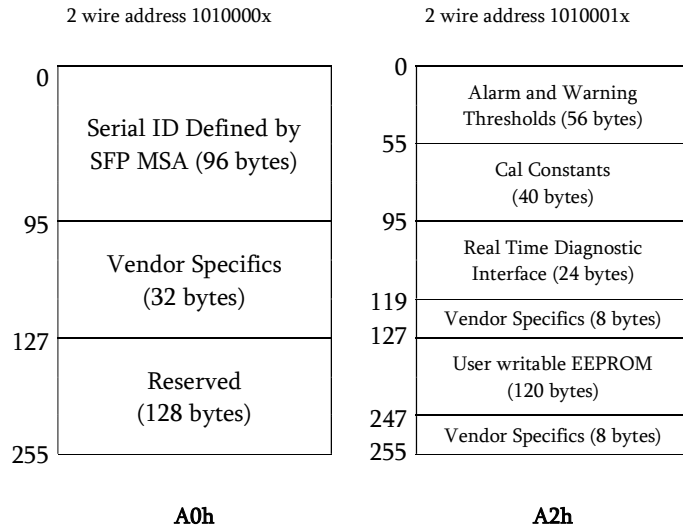


Figure 3. EEPROM of a SFP

# Datasheet

SFP15040GExx\_RevB



## 9. Ordering Information

Part Number	Description
SFP15040GE0D	SFP dual fibre, Tx 1550nm (DFB), Rx (PIN), maximum distance 40km, power budget 21dB, Gigabit Ethernet, LC connector, <b>0°C to 70°C</b> , DDM
SFP15040GE0B	SFP dual fibre, Tx 1550nm (DFB), Rx (PIN), maximum distance 40km, power budget 21dB, Gigabit Ethernet, LC connector, <b>Gen B, 0°C to 70°C</b> , DDM
SFP15040GE2D	SFP dual fibre, Tx 1550nm (DFB), Rx (PIN), maximum distance 40km, power budget 21dB, Gigabit Ethernet, LC connector, <b>-40°C to 85°C</b> , DDM
SFP15040GE2B	SFP dual fibre, Tx 1550nm (DFB), Rx (PIN), maximum distance 40km, power budget 21dB, Gigabit Ethernet, LC connector, <b>Gen B, -40°C to 85°C</b> , DDM

## 10. Document Revision Information

Revision	Description
A	Initial release
B	Generation B variants added. Industrial temperature variants added

Skylane Optics® supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:  
[support@skylaneoptics.com](mailto:support@skylaneoptics.com)

Beyond  
Quality

Reliable  
Alliance

Performing  
Smartly