

SFP85P55DRxx – SFP Dual Fibre

850nm / 550m / Dual Rate

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SFP85P55DRxx is a high performance transceiver module for up to 1.25Gbps data links over a multimode fibre pair. The maximum reach is 550m (50/125µm), with 7.5dB end of life (EOL) power budget. The transmitter is an 850nm VCSEL, the receiver is a PIN photodiode.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics' commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant (INF-8074)
- Hot pluggable SFP footprint
- Serial ID functionality supported according to (SFF-8472)
- Class 1 laser safety standard IEC 60825 compliant
- Dual LC Connector
- 850nm VCSEL transmitter
- Up to 550m point-to-point transmission on 50/125µm fibre
- Up to 300m point-to-point transmission on 62.5/125µm fibre
- Operating temperature range 0°C to 70°C, -20°C to 85°C or -40°C to 85°C
- Low power dissipation (<1W)
- Digital diagnostics monitoring (DDM)




Figure 1. SFP Dual Fibre (non-binding illustration)

3. Applications

- Gigabit Ethernet
- 1x Fiber Channel
- Fast Ethernet

4. Optical Interface

P/N	Wavelength [nm]	Optical Output Power ² [dBm]	Receiver Sensitivity ³ [dBm]	Receiver Overload ⁴ [dBm]	Power Budget ² [dB]
SFP85P55DRxx	850nm	-9.5 to -3	≤ -17	0	≥ 7.5

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured with 1.25Gbps PRBS 27-1, ER=9dB, BER≤10⁻¹²

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.

5. Technical Parameters

5.1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SFP85P55DR00, SFP85P55DR0D
	-20		85		SFP85P55DR10, SFP85P55DR1D
	-40		85		SFP85P55DR20, SFP85P55DR2D
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15		3.45	V	
Power Supply Current			300	mA	

5.2. Transmitter Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	-9.5		-3	dBm	5
Centre Wavelength	820	850	860	nm	
Spectral Width (RMS)			0.85	nm	
Extinction Ratio	9			dB	

5. Output power coupled into a 62.5/125 µm multimode fibre

5.3. Receiver Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Sensitivity			-17	dBm	6
Receiver Overload	0			dBm	6
Wavelength of Operation	760		860	nm	

6. Measured with 1.25Gbps PRBS 2⁷-1, ER=9dB, BER≤10⁻¹²

6. Transceiver Electrical Pad Layout

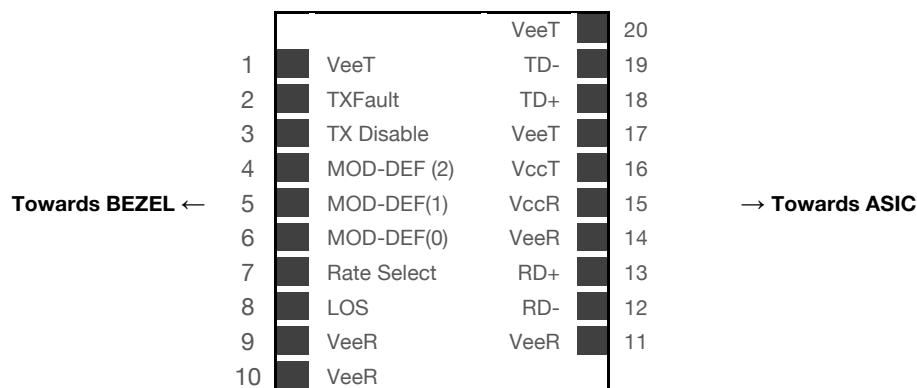


Figure 2. Transceiver Electrical Pad Layout

7. Module Electrical Pin Definition

SFP MSA (INF-8074i)

Pin Number	Name	Function
1	VeeT	Transmitter Ground
2	TX Fault	Transmitter Fault Indication
3	TX_Disable	Transmitter Disable
4	MOD-DEF2	2-Wire Serial Interface Data
5	MOD-DEF1	2-Wire Serial Interface Clock
6	MOD-DEF0	Grounded in Module
7	Rate Select	Not Used
8	LOS	Loss of Signal
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverted Received Data Out
13	RD+	Received Data Out
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmit Data In
19	TD-	Inverted Transmit Data In
20	VeeT	Transmitter Ground

8. EEPROM

SFP MSA (INF-8074 & SFF-8472)

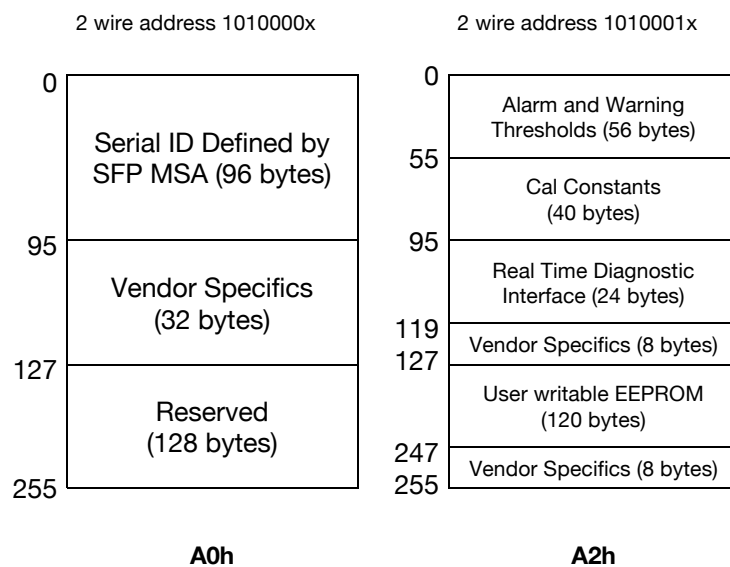


Figure 3. EEPROM of a an SFP

9. Ordering Information

Part Number	Description
SFP85P55DR00	SFP dual fibre, Tx 850nm (VCSEL), Rx (PIN), maximum distance 550m, power budget 7.5dB, Dual Rate, LC connector, 0°C to 70°C
SFP85P55DR0D	SFP dual fibre, Tx 850nm (VCSEL), Rx (PIN), maximum distance 550m, power budget 7.5dB, Dual Rate, LC connector, 0°C to 70°C, DDM
SFP85P55DR10	SFP dual fibre, Tx 850nm (VCSEL), Rx (PIN), maximum distance 550m, power budget 7.5dB, Dual Rate, LC connector, -20°C to 85°C
SFP85P55DR1D	SFP dual fibre, Tx 850nm (VCSEL), Rx (PIN), maximum distance 550m, power budget 7.5dB, Dual Rate, LC connector, -20°C to 85°C, DDM
SFP85P55DR20	SFP dual fibre, Tx 850nm (VCSEL), Rx (PIN), maximum distance 550m, power budget 7.5dB, Dual Rate, LC connector, -40°C to 85°C
SFP85P55DR2D	SFP dual fibre, Tx 850nm (VCSEL), Rx (PIN), maximum distance 550m, power budget 7.5dB, Dual Rate, LC connector, -40°C to 85°C, DDM

10. Document Revision Information

Revision	Description
A	Initial release
B	Industrial temperature variant added

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

**Beyond
Quality**

**Reliable
Alliance**

**Performing
Smartly**