

SBU35020PAxD – SFP Single Upstream Transceiver

Tx 1310nm & Rx 1550nm / 20km / OC-48 / STM-16 Multirate

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SBU35020PAxD is a high performance transceiver module for 100 Mbps to 2.67 Gbps data links over a single mode fibre. The maximum reach is 20km, with 13dB end of life (EOL) power budget. The transmitter is a 1310nm DFB laser, the receiver is a 1550nm PIN photodiode. Consequently, a module with a 1550nm emitter and a 1310nm receiver is required at the opposite side of the link. The recommended counterpart is SBD53020PAxD.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics® commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant (INF-8074)
- Hot pluggable SFP footprint
- Serial ID functionality supported according to SFF-8472
- Class 1 laser safety standard IEC 60825 compliant
- Single LC or SC Connector
- 1310nm DFB transmitter, 1550nm PIN receiver
- Data Rate up to 2.67Gbps
- 20km point-to-point transmission on single mode fibre
- Operating temperature range 0°C to 70°C or -40°C to 85°C
- Low power dissipation (<1W)
- Digital diagnostics monitoring (DDM)

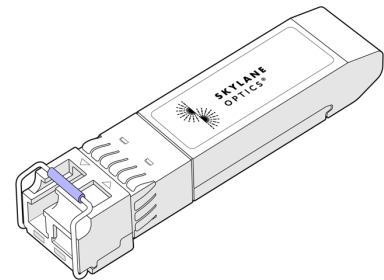


Figure 1. SFP Single Fiber (non-binding illustration)

3. Applications

- Storage, 2x Fibre channel, 1x Fibre channel
- Datacom Ethernet, Fast Ethernet, Gigabit Ethernet
- Telecom Sonet/SDH, Sonet OC-48/ SDH STM-16, Sonet OC-12 / SDH STM-4, Sonet OC-3/ SDH STM-1

4. Optical Interface

P/N	Wavelength [nm]	Output Optical Power ² [dBm]	Optical Receiver Sensitivity ³ [dBm]	Optical Receiver Overload ⁴ [dBm]	Power Budget ² [dB]
SBU35020PAxD	Tx 1310 nm Rx 1550 nm	-5 to 0	≤ -18	-3	≥ 13

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured with 2.5Gbps PRBS 223-1, ER=9dB, BER≤10-12

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.

5. Technical Parameters

5.1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SBU35020PA0D, SBU35020PA3D
	-40		85	°C	SBU35020PA2D, SBU35020PA5D
Relative Humidity			95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

5.2. General Specifications

Parameter	Min	Typ	Max	Unit	Notes
Data Rate	0.1		2.67	Gbps	

5.3. Receiver Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	-5		0	dBm	5
Centre Wavelength	1270	1310	1350	nm	
Optical Extinction Ratio ER	5			dB	6
Spectral Width (-20dB)			1	nm	

5. Output power coupled into a 9/125 µm single-mode fibre
 6. Measured with 2.5Gbps PRBS 2²³-1, filtered

5.4. Receiver Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Sensitivity			-18	dBm	7
Receiver Overload	-3			dBm	7
Wavelength of Operation	1520		1580	nm	

7. Measured with 2.5Gbps PRBS 2²³-1, ER=9dB, BER≤10⁻¹²

6. Transceiver Electrical Pad Layout

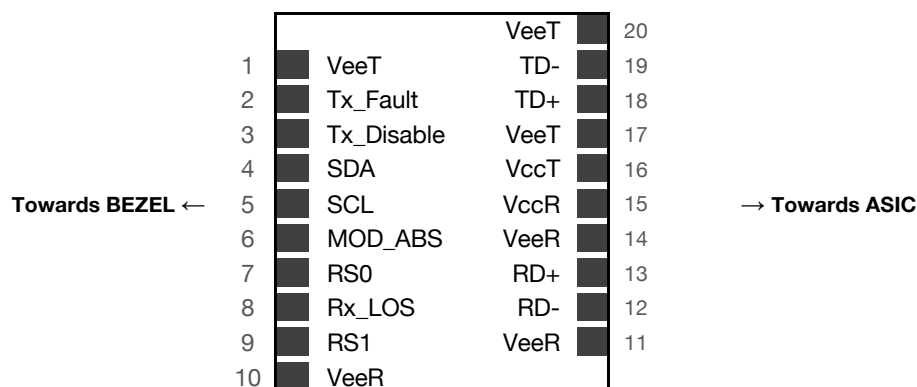



Figure 2. Transceiver Electrical Pad Layout

7. Module Electrical Pin Definition

Pin Number	Name	Function
1	VeeT	Transmitter Ground
2	TX_Fault	Transmitter Fault Indication
3	TX_Disable	Transmitter Disable
4	SDA	2-Wire Serial Interface Data (SDA)
5	SCL	2-Wire Serial Interface Clock (SCL)
6	MOD_ABS	Grounded within the module
7	RS0	Not Connected
8	Rx_LOS	Loss of signal
9	RS1	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverted received data output
13	RD+	Received data output
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmit data input
19	TD-	Inverted transmit data input
20	VeeT	Transmitter Ground

8. EEPROM

MSA compliant (INF-8074 & SFF-8472)

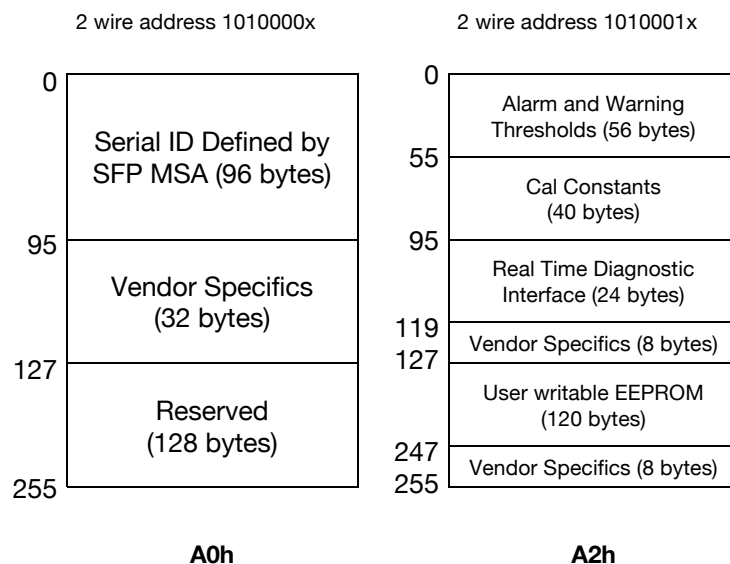

9. Ordering Information

Part Number	Description
SBU35020PA0D	SFP single fibre upstream, Tx 1310nm (DFB) , Rx 1550nm (PIN), maximum distance 20km, power budget 13dB, OC-48 multirate, LC connector, 0°C to 70°C, DDM
SBU35020PA2D	SFP single fibre upstream, Tx 1310nm (DFB) , Rx 1550nm (PIN), maximum distance 20km, power budget 13dB, OC-48 multirate, LC connector, -40°C to 85°C, DDM
SBU35020PA3D	SFP single fibre upstream, Tx 1310nm (DFB) , Rx 1550nm (PIN), maximum distance 20km, power budget 13dB, OC-48 multirate, SC connector, 0°C to 70°C, DDM
SBU35020PA5D	SFP single fibre upstream, Tx 1310nm (DFB) , Rx 1550nm (PIN), maximum distance 20km, power budget 13dB, OC-48 multirate, SC connector, -40°C to 85°C, DDM

10. Document Revision Information

Revision	Description
A	Initial release

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

**Beyond
Quality**

**Reliable
Alliance**

**Performing
Smartly**