

SFP13002FExx – SFP Dual Fibre

1310nm / 2km / Fast Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SFP13002FExx is a high performance transceiver module for Fast Ethernet data links over a multimode fibre pair. The maximum reach is 2km, for an 8dB end of life (EOL) power budget on a 50/125µm multimode link. The emitter is a 1310nm Fabry Perot (FP) laser, the receiver is a PIN photodiode.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant [INF-8074]
- Hot pluggable SFP footprint
- Serial ID functionality supported according to [SFF-8472]
- Class 1 laser safety standard IEC 60825 compliant
- Dual LC connector
- 1310nm FP transmitter
- 2km point-to-point transmission on 50/125µm multimode fibre
- 1km point-to-point transmission on 62.5/125µm multimode fibre
- Fast Ethernet compliant
- Operating temperature range 0°C to 70°C or -20°C to 85°C
- Low power dissipation (<1W)
- Digital diagnostics monitoring (DDM)

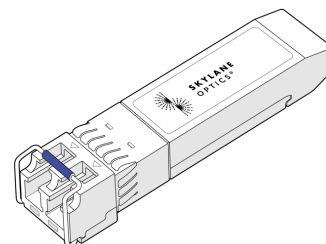


Figure 1. SFP Dual Fibre 1310nm (non-binding illustration)

3. Applications

- FTTx
- Fast Ethernet

4. Optical Interface

P/N	Wavelength [nm]	Output Optical Power ² [dBm]	Optical Receiver Sensitivity ³ [dBm]	Optical Receiver Overload ⁴ [dBm]	Power Budget ² [dB]
SFP13002FExx	1310nm	-19 to -14	≤ -30	0	≥ 11

1. Distance is estimated assuming typical optical losses after decent quality fiber deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured at Fast Ethernet

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.

5. Technical Parameters

5.1. Recommended Operating Conditions					
Parameter	Min	Typ	Max	Units	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	-20		85	°C	SFP13002FE1x
Operating Case Temperature	0		70	°C	SFP13002FE0x
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

5.2. Transmitter Optical Specifications					
Parameter	Min	Typ	Max	Units	Notes
Average Output Power	-19		-14	dBm	5
Center Wavelength	1260	1310	1360	nm	
Optical Extinction Ratio ER	8.2			dB	
Spectral Width (RMS)			10	nm	

5. Output power coupled into a 62.5/125 mm multi-mode fiber.

5.3. Receiver Optical Specifications					
Parameter	Min	Typ	Max	Units	Notes
Sensitivity			-30	dBm	6
Receiver Overload	0			dBm	
Wavelength of Operation	1260		1600	nm	

6. With BER better than or equal to 1×10^{-12} , measured in the center of the eye opening with 2^7-1 PRBS

6. Transceiver Electrical Pad Layout

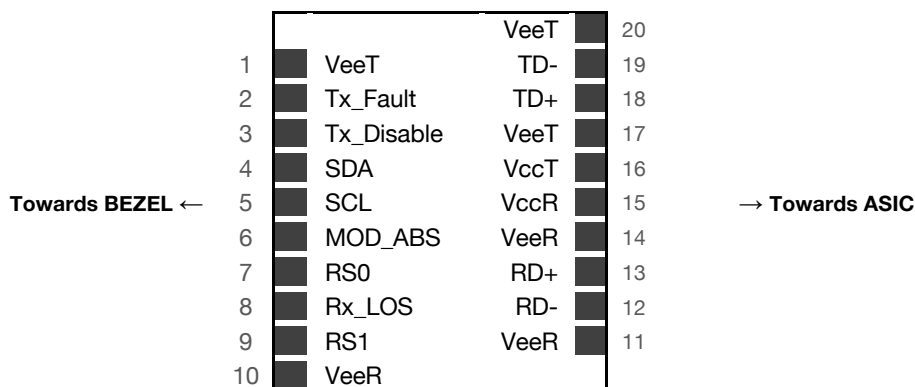


Figure 2. Transceiver Electrical Pad Layout

9. Ordering Information

Part Number	Description
SFP13002FE00	SFP dual fibre, Tx 1310nm (FP) , Rx (PIN), maximum distance 2km, power budget 11dB, Fast Ethernet, LC connector, 0°C to 70°C
SFP13002FE0D	SFP dual fibre, Tx 1310nm (FP) , Rx (PIN), maximum distance 2km, power budget 11dB, Fast Ethernet, LC connector, 0°C to 70°C, DDM
SFP13002FE10	SFP dual fibre, Tx 1310nm (FP) , Rx (PIN), maximum distance 2km, power budget 11dB, Fast Ethernet, LC connector, -20°C to 85°C
SFP13002FE1D	SFP dual fibre, Tx 1310nm (FP), Rx (PIN), maximum distance 2km, power budget 11dB, Fast Ethernet, LC connector, -20°C to 85°C, DDM

10. Document Revision Information

Revision	Description
A	Initial release

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

**Beyond
Quality**

**Reliable
Alliance**

**Performing
Smartly**