

SFP85002FExx – SFP Dual fibre

850nm / 2km / Fast Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.

1. Overview

SFP85002FExx is a high performance transceiver module for Fast Ethernet data links over a multimode fibre pair. The maximum reach is 2km, for a 8.5dB end of life (EOL) power budget. The emitter is an 850nm VCSEL laser, the receiver is a PIN photodiode.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics commercial agents for compatibility with different equipment platforms.

2. Features

- SFP Multi-Source Agreement compliant [INF-8074]
- Hot pluggable SFP footprint
- Serial ID functionality supported according to [SFF-8472]
- Class 1 laser safety standard IEC 60825 compliant
- Dual LC connector
- 850nm VCSEL laser
- Up to 2km point-to-point transmission on multimode fibre
- Fast Ethernet compliant
- Operating temperature range 0°C to 70°C, -20°C to 85°C or -40°C to 85°C
- Low power dissipation (<1W)
- Digital Diagnostic Monitoring (DDM)




Figure 1. SFP Dual Fiber 850nm (non-binding illustration)

3. Applications

- FTTx
- Fast Ethernet

4. Optical Interface

P/N	Wavelength [nm]	Output Optical Power ² [dBm]	Optical Receiver Sensitivity ³ [dBm]	Optical Receiver Overload ⁴ [dBm]	Power Budget ² [dB]
SFP85002FExx	850nm	-9.5 to -4	≤ -18	-3	≥ 8.5

1. Distance is estimated assuming typical optical losses after decent quality fiber deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured at Fast Ethernet

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used.



7. Module Electrical Pin Definition

Pin Number	Name	Function
1	VeeT	Transmitter Ground
2	TX_Fault	Transmitter Fault Indication
3	TX_Disable	Transmitter Disable
4	SDA	2-Wire Serial Interface Data (SDA)
5	SCL	2-Wire Serial Interface Clock (SCL)
6	MOD_ABS	Function Not available
7	RS0	Rate Select 0 grounded
8	Rx_LOS	Loss of signal
9	RS1	Rate select 1 grounded
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverted received data output
13	RD+	Received data output
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmit data input
19	TD-	Inverted transmit data input
20	VeeT	Transmitter Ground

8. EEPROM

SFP MSA [INF-8074]

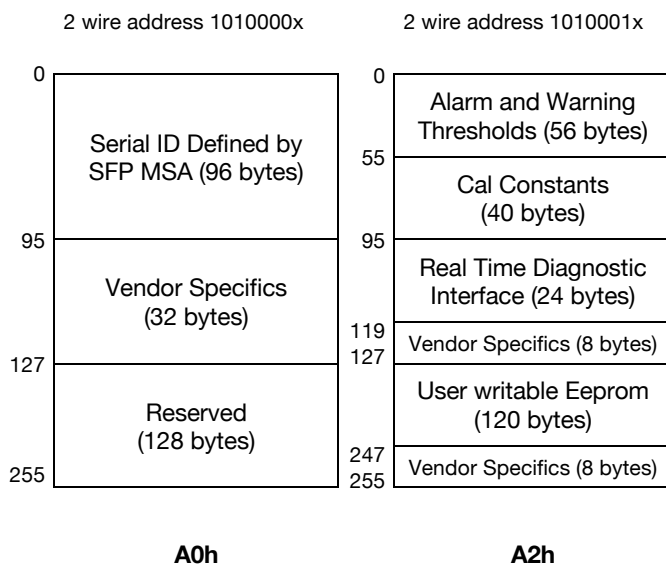


Figure 3. EEPROM of a SFP



9. Ordering Information

Part Number	Description
SFP85002FE00	SFP dual fibre, Tx 850nm (FP) , Rx (PIN), maximum distance 2km, power budget 8.5dB, Fast Ethernet, LC connector, 0°C to 70°C
SFP85002FE0D	SFP dual fibre, Tx 850nm (FP) , Rx (PIN), maximum distance 2km, power budget 8.5dB, Fast Ethernet, LC connector, 0°C to 70°C, DDM
SFP85002FE10	SFP dual fibre, Tx 850nm (FP) , Rx (PIN), maximum distance 2km, power budget 8.5dB, Fast Ethernet, LC connector, -20°C to 85°C
SFP85002FE1D	SFP dual fibre, Tx 850nm (FP) , Rx (PIN), maximum distance 2km, power budget 8.5dB, Fast Ethernet, LC connector, -20°C to 85°C, DDM
SFP85002FE20	SFP dual fibre, Tx 850nm (FP) , Rx (PIN), maximum distance 2km, power budget 8.5dB, Fast Ethernet, LC connector, -40°C to 85°C
SFP85002FE2D	SFP dual fibre, Tx 850nm (FP) , Rx (PIN), maximum distance 2km, power budget 8.5dB, Fast Ethernet, LC connector, -40°C to 85°C, DDM

Skylane Optics supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:
support@skylaneoptics.com

**Beyond
Quality**

**Reliable
Alliance**

**Performing
Smartly**